

# Easy to Follow Instructions


01181122 Sickening Reaper

PLEASE READ ALL INSTRUCTIONS CAREFULLY BEFORE ASSEMBLING.


Care & Storage Instructions: Store product in its original package. Keep away from heat & moisture. For indoor use only. Assemble on a flat surface. Save instruction sheet for future reference.

**This item, when assembled by the following instructions, should take 15 minutes to assemble. Please follow the step by step guide and enjoy your Sickening Reaper!**


## Parts List:




Costume Base




Base




Lower Support Poles




Support Poles




Upper Support Poles




Costume




Hip Frame




Torso Frame




Chest Ring




Head




Sash




Left Arm




Left Hand




Scythe Top




Scythe Pole x 4




Scythe Bone x 2




Scythe Connector




Scythe Fabric




Right Arm



Pointing Right Hand



Shroud




Hood

UL Power Adapter Specification:  
Input: 120V~ 60Hz  
Output: 6VDC 1000mA


Only use adapter with same technical specification.

## Assembly Instructions:

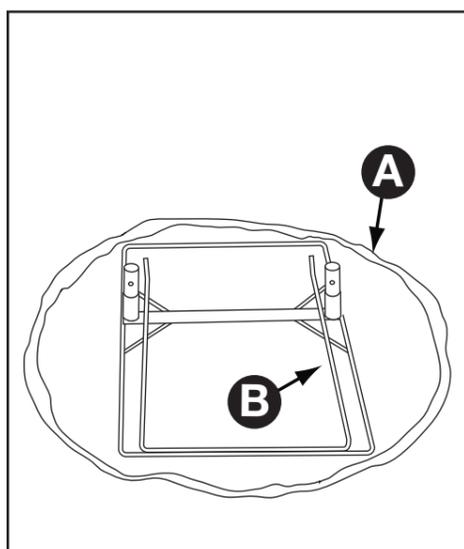


### STEP 1

**NOTE:** The longer end of the (B) Base goes towards the front. First, lay the (A) Costume Base down with the hook & loop closure side facing up, and set the (B) Base on top of the (A) Costume Base as shown.

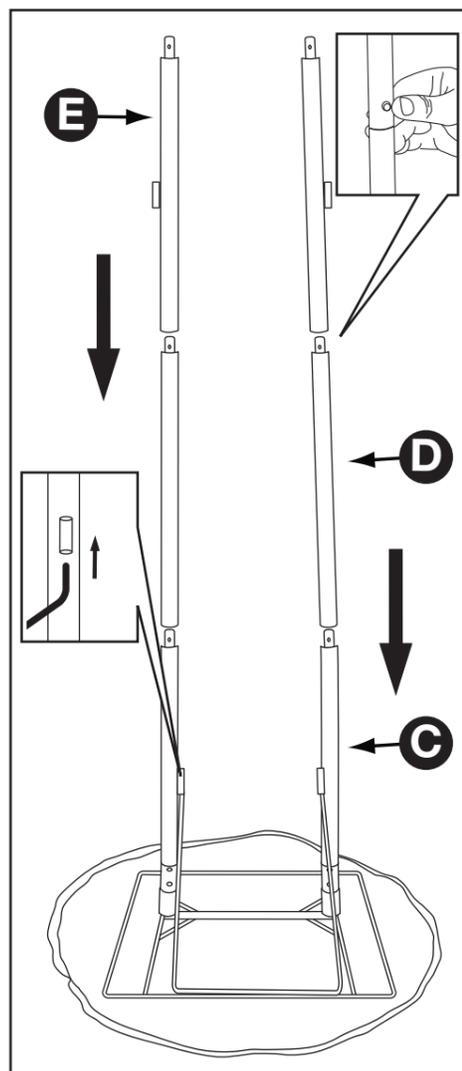


### STEP 2

Now assemble the (C) Lower Support Poles to the (B) Base with the slot housings facing in as shown, and secure by aligning the quick-connect push buttons into the pre-drilled holes. Be sure to set the cross-braces located at the front of the (B) Base into the slot housings on the (C) Lower Support Poles as shown. Next, assemble the (D) Support Poles into the tops of the (C) Lower Support Poles and the (E) Upper Support Poles into the tops of the (D) Support Poles as shown and secure by aligning the quick-connect push buttons into the pre-drilled holes. Note that the slot housings on the (E) Upper Support Poles should be facing outward.

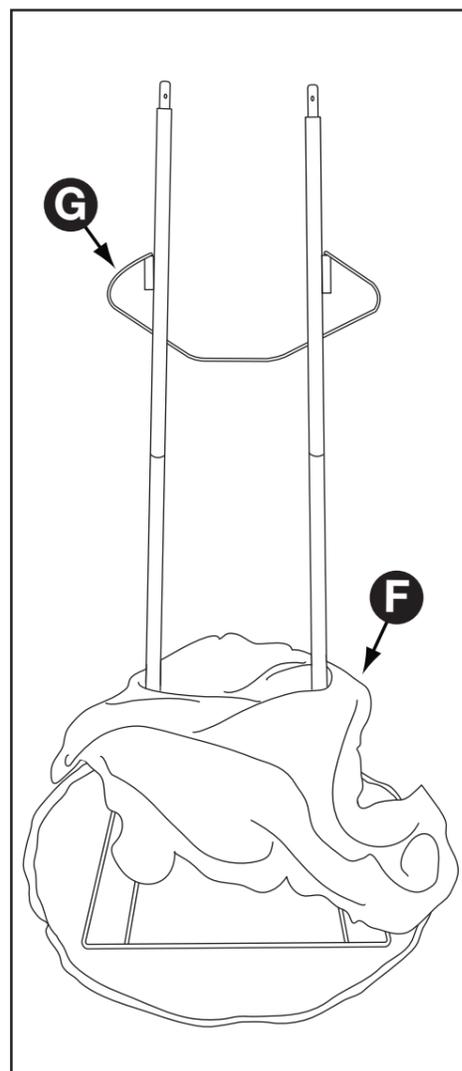

### STEP 3




Next, lower the (F) Costume over the (C/D/E) Support Poles so that the (F) Costume opens/closes at the back and the "torn chest" section is at the front. Leave the hook & loop closures at the bottom of the (F) Costume unsecured from the (A) Costume Base for now. Now, set the (G) Hip Frame into the slot housings on the (E) Upper Support Poles. **NOTE:** The pegs on either side of the Hip Hoop are different sizes and can only be assembled onto the (E) Upper Support Poles one way.

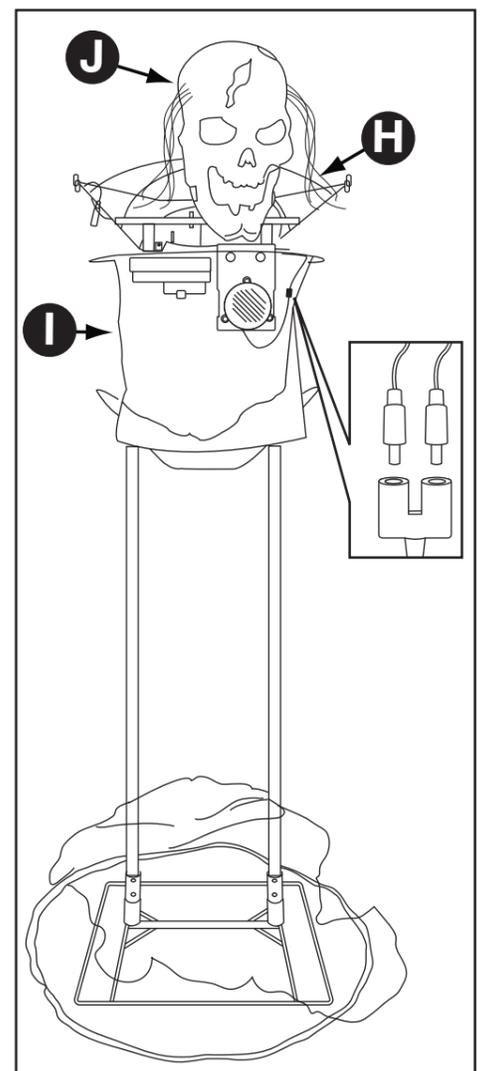

### STEP 4

Assemble the (H) Torso Frame onto the (E) Upper Support Poles as shown, and secure by aligning the quick-connect push buttons into the pre-drilled holes. Now set the (I) Chest Ring into the slot housings located on the lower poles of the (H) Torso Frame. Next, connect the lighting cable from the (I) Chest Ring to the color-coordinated cable on the (H) Torso Frame. Then, set the (J) Head onto the (H) Torso Frame by sliding the forked-hook into the "neck" slot housing on the (H) Torso Frame, and connect the cable from the (J) Head to the color-coordinated cable on the (H) Torso Frame.

# Assembly Instructions: (cont.)

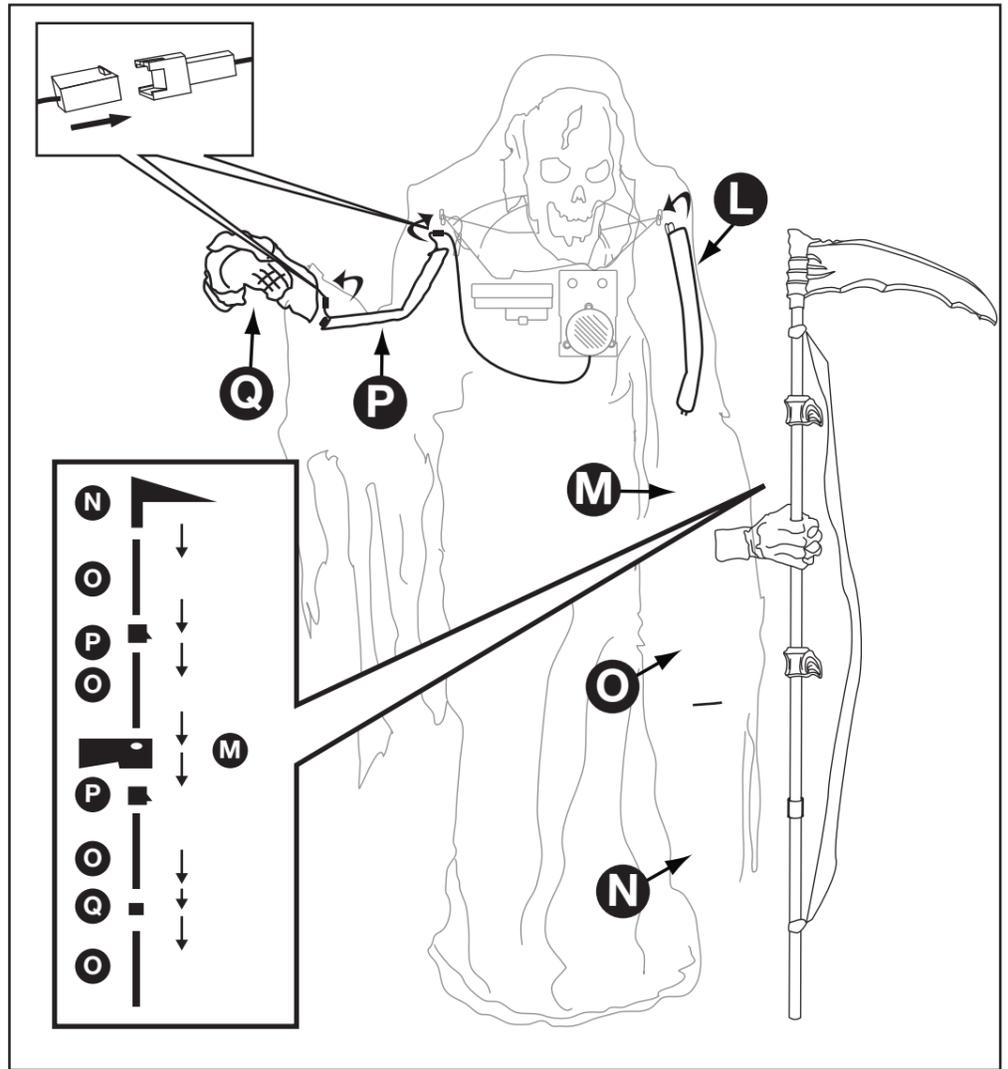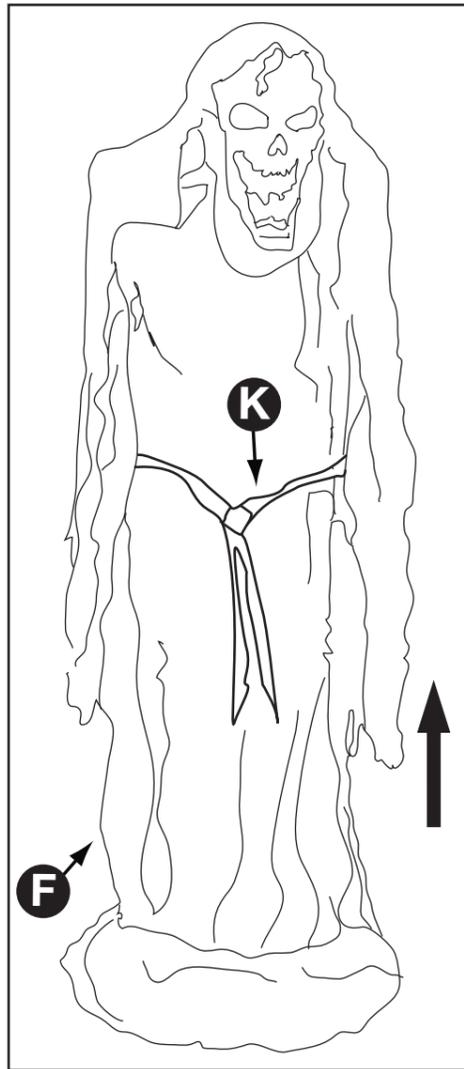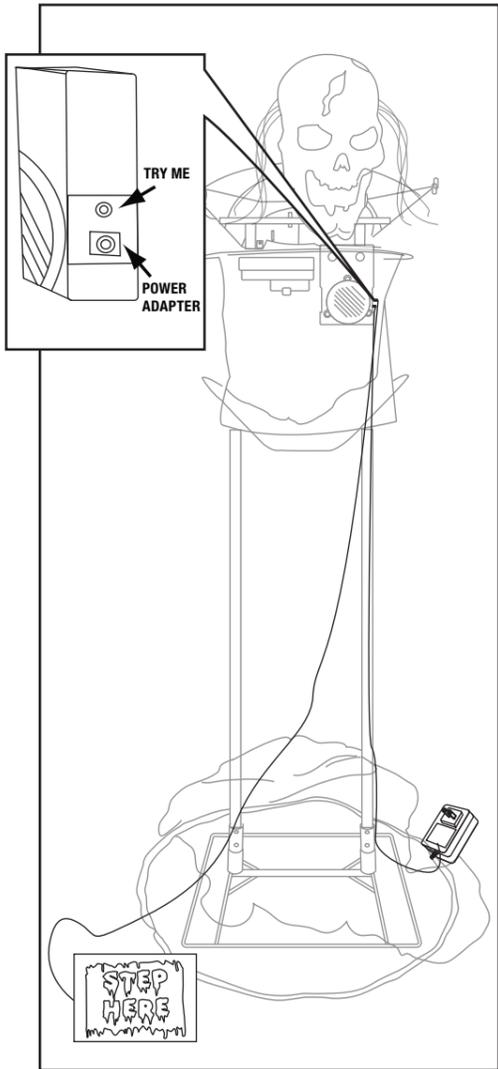

## STEP 5

Now, plug the UL Power Adapter into the input receiving jack marked "DC 6V" on the Function Control box and route the power cord down and out the bottom of the (F) Costume.

OPTIONAL: If you choose to use Spirit's Step Here Foot pad (sold separately), plug the connector into the input receiving jack marked "TRY ME" on the Function Control box and route the Step Here pad down and out the bottom of the (F) Costume, then set the Step Here pad in front of the character.

## STEP 6

Pull the (F) Costume up over (E) Torso Frame and leave the hook and loop closures open at the back for now. Wrap the (K) Sash around the tops of the (G) Hip Frame and tie in the front.



## STEP 7

Slide the (L) Left Arm up through the left sleeve and slide the forked-hook into the left "shoulder" slot housing on the (H) Torso Frame. Set the (M) Left Hand into place by sliding the forked-hook into the "wrist" slot housing on the end of the arm. Then, assemble the top section of the Scythe (N, O, P) and bottom sections (O, Q, P) of the Scythe together as shown, and secure through the hole of the (M) Left Hand. Now wrap the (R) Scythe Fabric around the assembled Scythe as shown.

Now, slide the (S) Right Arm up through the right sleeve and slide the forked-hook into the right "shoulder" slot housing on the (H) Torso Frame and connect the cable on the (S) Right Arm to the color-coordinated cable on the (H) Torso Frame. Set the (T) Pointing Right Hand into place by sliding the forked-hook into the "wrist" slot housing on the end of the arm and connect the cable from the (T) Pointing Right Hand to the cable on the (S) Right Arm. Now you can secure the hook and loop closures at the back of the (F) Costume.

# Operation Instructions:

# Optional:

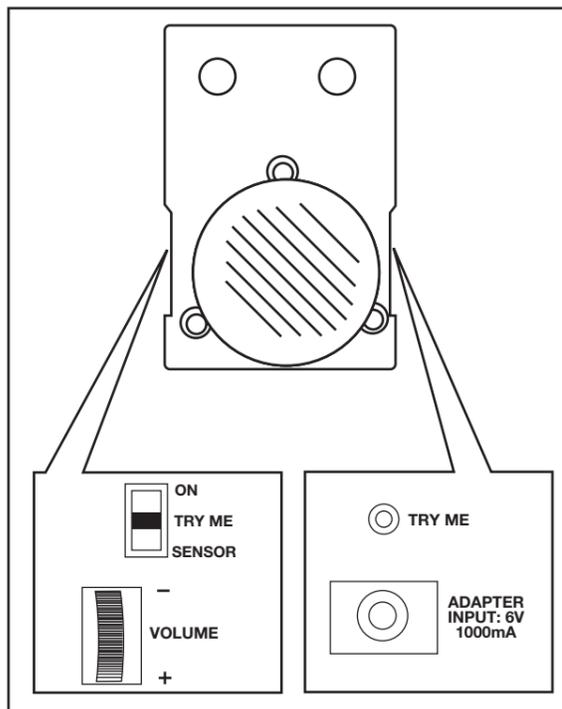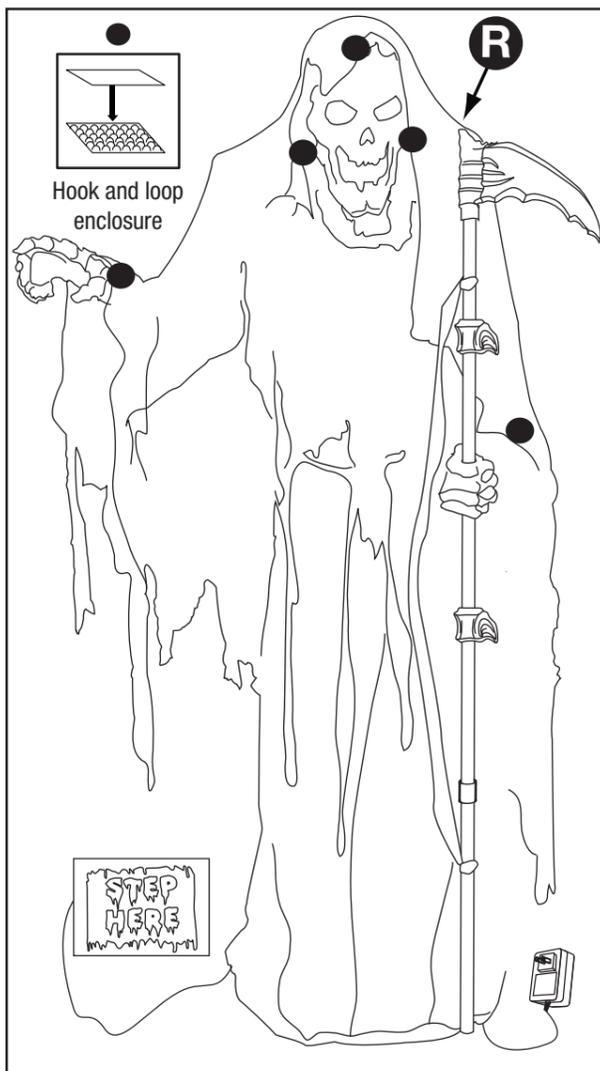


1. Plug the UL power adapter into a standard power outlet and adjust the settings on the Function Control box to your liking.

2. The Sickening Reaper has 3 operation settings which can be found on the main Function Control box on the (F) Torso Frame:

- On: This setting allows the item to run continuously.
- Sensor: This setting allows the item to only be activated when the infra-red sensor is activated. The item will operate for one audio-cycle with each sensor activation. The Infra-red (IR) sensor will activate when someone comes within an 80-degree angle from left-to-right, as well as from above and below. The infra-red (IR) sensor has a range of up to 2 meters/6.56 feet, and can work in all lighting conditions – bright light to no-light!
- Off/Try-Me: This setting allows the item to be activated only if the Try-Me is triggered. The item will operate for one audio-cycle with each Try-Me activation.

3. The Function Control box also includes a Volume Control knob, which allows you to adjust the volume to be as loud or as quiet as needed. Be sure to test the item before finalizing your display so you can set the volume to your liking.

Enjoy your SICKENING REAPER!

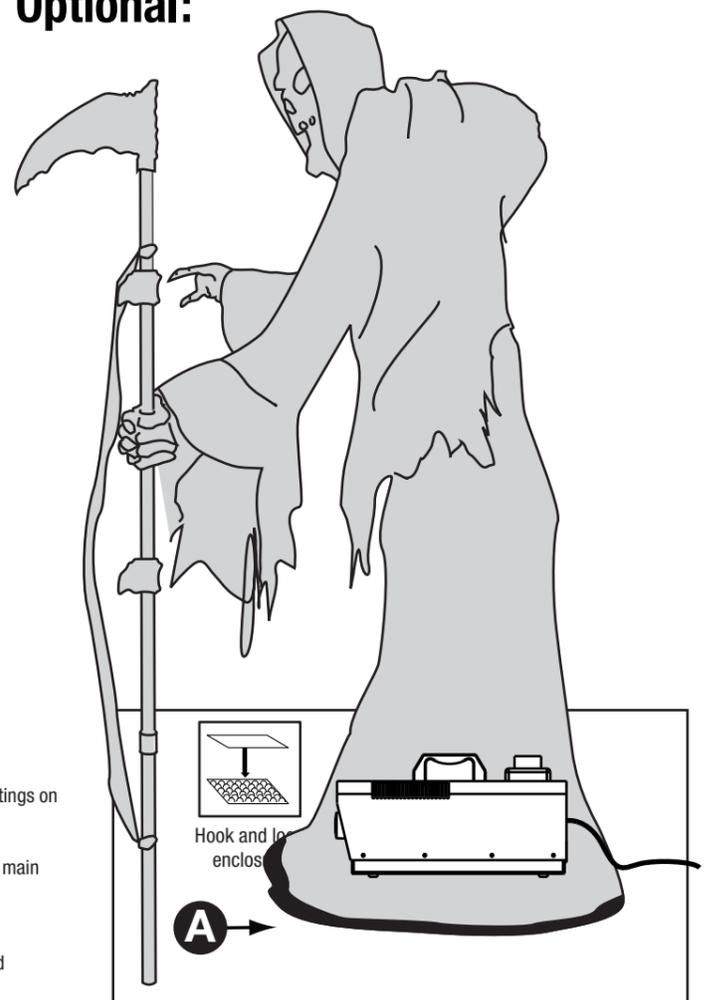

The Sickening Reaper has been designed so a fog machine (not included) can be placed inside of the (F) Costume on top of the (B) Base. Lift up the (F) Costume at the bottom and carefully place your fog machine on the (B) Base, making sure the sides of the (F) Costume are not touching the sides of your fog machine. Now secure the hook and loop closures at the bottom of the (F) Costume to the corresponding closures on the (A) Costume Base to seal the fog inside, and plug your fog machine into a grounded power outlet. Turn on your fog machine and watch the fog pour out of his arms, chest and head, adding an extra horrifying effect to your character!

Note: Try adding newspaper or stuffing (not included) into the upper arms of his shirt for added realism!

Additional Note: You can also push holes through the gray gauze of the (F) Costume and the (V) Shroud to make your character look extra moth-eaten and creepy!